

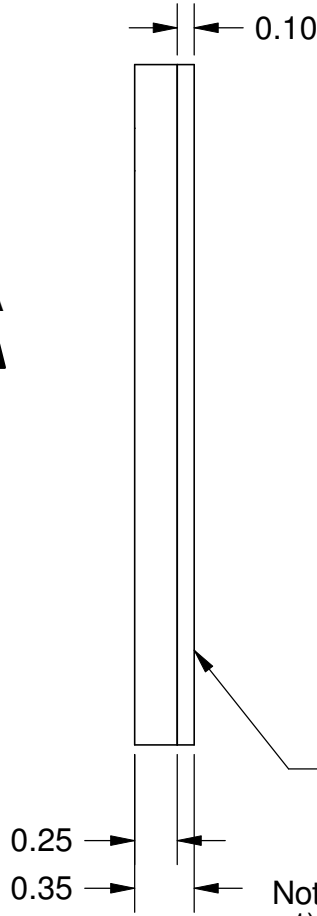


SIDE VIEW





BOTTOM VIEW

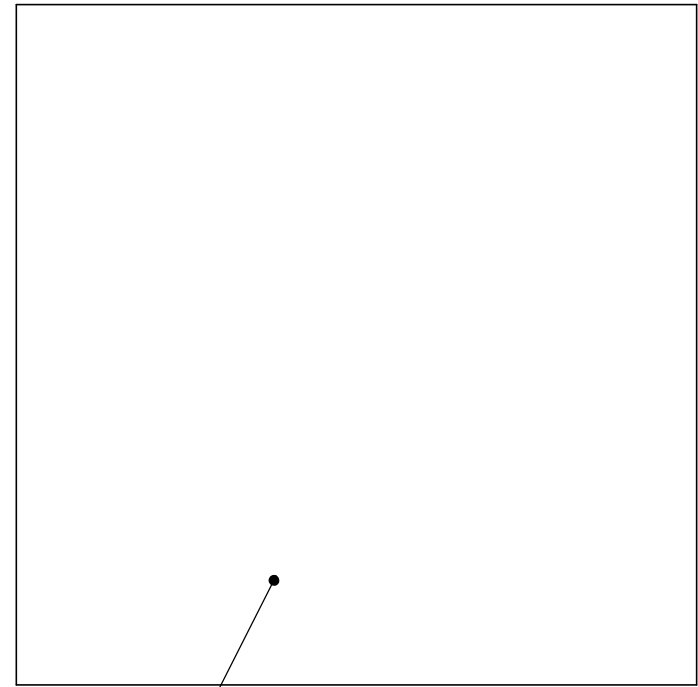

SECTION A-A

Notes: (Unless Otherwise Specified).

- 1) MATERIAL:
 - A) LID: AL₂O₃ BLACK CERAMIC.
 - B) PREFORM: B-STAGE THERMOSET EPOXY.
- 2) RECOMENDED CURE:
 - Step 1 - Preheat QFN at 75°C.
 - Step 2 - Cure at 125°C for 30 minutes.
 - Step 3 - Cure at 165°C for 60 minutes.
- 3) STORAGE LIFE: 6 MONTHS @ 25°C.
- 4) DIMENSIONS IN MM.

| | | | | | | | | | | | | | |
|---|-----------|----------------|--|------------|--|--|--|--------------|-------------|--|--|--|--|
| TOLERANCE UNLESS NOTED | | APPROVALS | | DATE | |  Mirror Semiconductor™ | | | | | | | |
| X.X | +/- 0.3 | DRAWN J. Hines | | 10/31/2010 | | | | | | TITLE C-LID4W-BLACK 4X4mm CERAMIC LID B-STAGE EPOXY | | | |
| X.XX | +/- 0.03 | | | | | | | | | | | | |
| X.XXX | +/- 0.003 | ENG | | | | SCALE | | SIZE | DRAWING NO. | REV | | | |
| ANGLES +/- 0.5° | | MFG | | | | 22.5:1 | | A | 204063 | A | | | |
| ALL DIMENSIONS IN | | QA | | | | | | | | | | | |
| <input type="checkbox"/> INCHES <input checked="" type="checkbox"/> MILLIMETERS | | CUST | | | | | | | | | | | |
| THIRD ANGLE PROJECTION | | REVISED | | | | | | | | | | | |
|  | | | | | | DO NOT SCALE DRAWING | | SHEET 1 OF 1 | | | | | |