

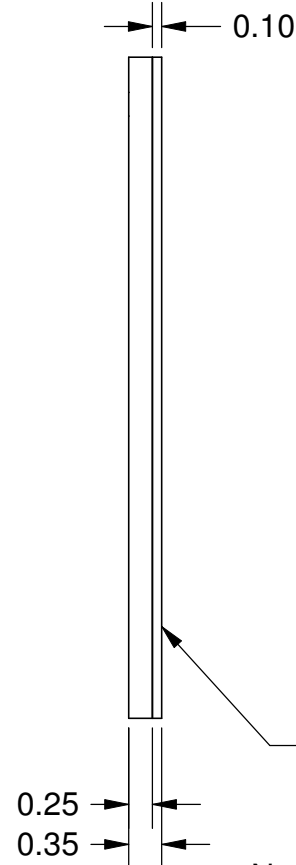


SIDE VIEW




BOTTOM VIEW

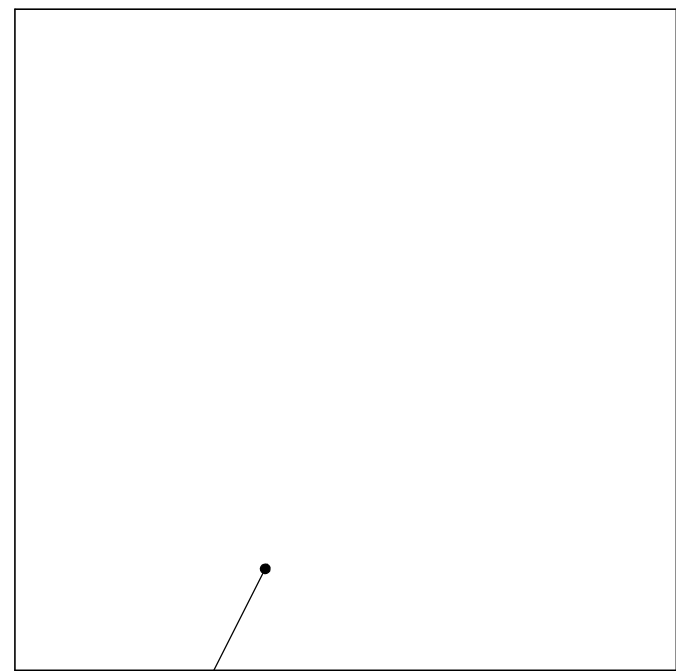

SECTION A-A

- Notes: (Unless Otherwise Specified).
- 1) MATERIAL:
 - A) LID: AL₂O₃ BLACK CERAMIC.
 - B) PREFORM: B-STAGE THERMOSET EPOXY.
 - 2) RECOMENDED CURE:
 - Step 1 - Preheat QFN at 75°C.
 - Step 2 - Cure at 125°C for 30 minutes.
 - Step 3 - Cure at 165°C for 60 minutes.
 - 3) STORAGE LIFE: 6 MONTHS @ 25°C.
 - 4) DIMENSIONS IN MM.

TOLERANCE UNLESS NOTED		APPROVALS		DATE		 Mirror Semiconductor™							
X.X	+/- 0.3	DRAWN J. Hines		10/31/2010						TITLE C-LID7W-BLACK 7X7mm CERAMIC LID B-STAGE EPOXY			
X.XX	+/- 0.03												
X.XXX	+/- 0.003	ENG				SCALE		SIZE		DRAWING NO.		REV	
ANGLES +/- 0.5°		MFG				12.5:1		A		207063		A	
ALL DIMENSIONS IN		THIRD ANGLE PROJECTION		QA									
<input type="checkbox"/> INCHES <input checked="" type="checkbox"/> MILLIMETERS		CUST		REVISED									
