

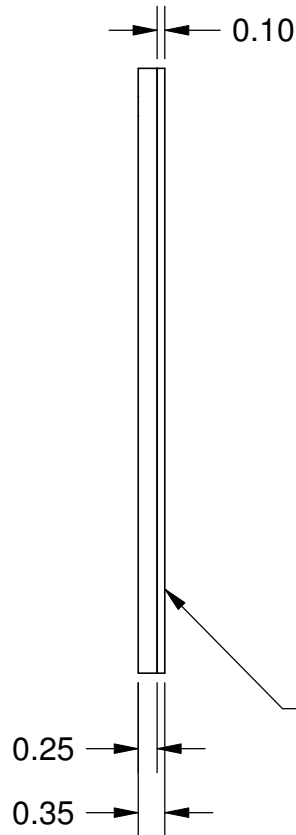


SIDE VIEW




BOTTOM VIEW

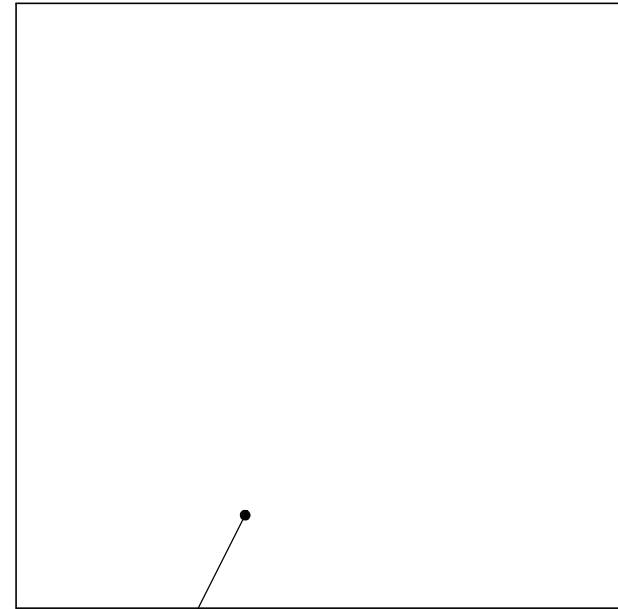

SECTION A-A

Notes: (Unless Otherwise Specified).

- 1) MATERIAL:
  - A) LID: AL<sub>2</sub>O<sub>3</sub> BLACK CERAMIC.
  - B) PREFORM: B-STAGE THERMOSET EPOXY.
- 2) RECOMENDED CURE:
  - Step 1 - Preheat QFN at 75°C.
  - Step 2 - Cure at 125°C for 30 minutes.
  - Step 3 - Cure at 165°C for 60 minutes.
- 3) STORAGE LIFE: 6 MONTHS @ 25°C.
- 4) DIMENSIONS IN MM.

TOLERANCE UNLESS NOTED		APPROVALS		DATE		 <b>Mirror</b> Semiconductor™						
X.X	+/- 0.3	DRAWN J. Hines		10/31/2010						TITLE C-LID8W-BLACK 8X8mm		
X.XX	+/- 0.03	ENG				CERAMIC LID B-STAGE EPOXY						
X.XXX	+/- 0.003	MFG				SCALE 10:1		SIZE A		DRAWING NO. 208063		REV A
ANGLES +/- 0.5°		QA				DO NOT SCALE DRAWING		SHEET 1		OF 1		
ALL DIMENSIONS IN		CUST										
<input type="checkbox"/> INCHES <input checked="" type="checkbox"/> MILLIMETERS		REVISED										
THIRD ANGLE PROJECTION												
