




TOP VIEW

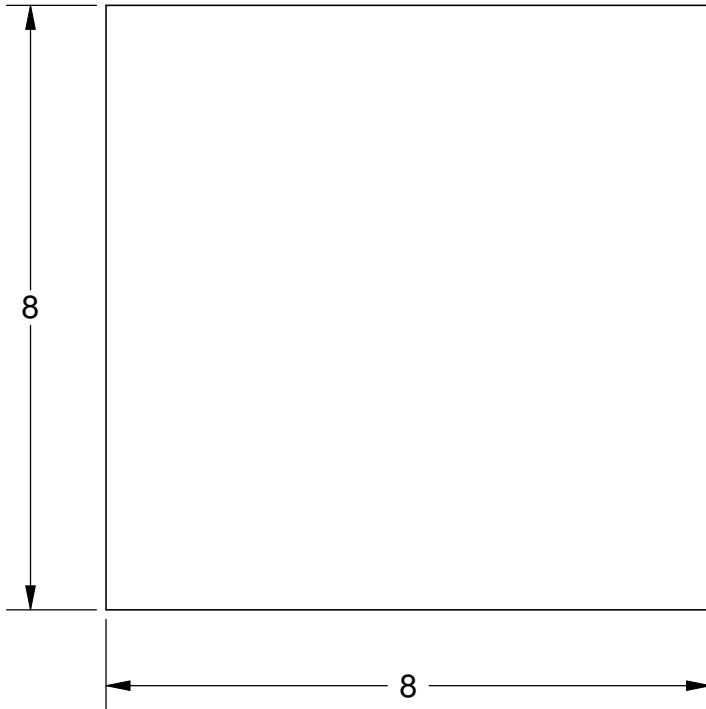

SIDE VIEW

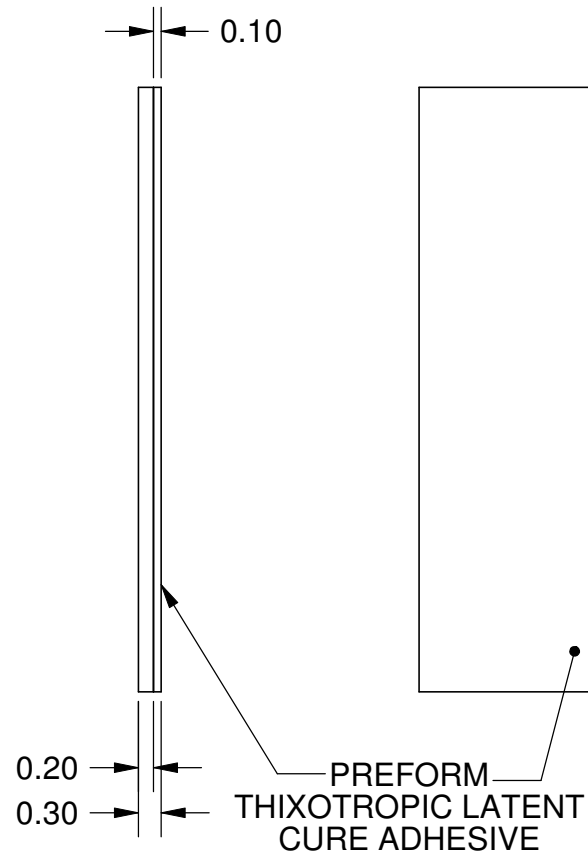

BOTTOM VIEW



Notes: (Unless Otherwise Specified).

1) MATERIAL:

A) LID: BLACK = PLASTIC BT.



B) PREFORM: LCA3000X LATENT CURE ADHESIVE.

2) RECOMENDED CURE:

BAKE AT 150°C FOR 60 MINUTES(MINIMUM)  
WITH PRESSURE 1/2-LBS PER SQUARE INCH.

3) STORAGE LIFE: 12 MONTHS @ 25 °C, 24 MONTHS @ 0 °C.

4) THAW IF FROZEN: 8 HOURS (MIN) @ 25 °C BEFORE USE.

TOLERANCE UNLESS NOTED		APPROVALS		DATE	 <b>Mirror</b> Semiconductor™							
X.X	+/- 0.3	DRAWN J. Hines		11/27/2011					TITLE <b>B-LID 8X8mm</b> <b>LID WITH PREFORM ADHESIVE</b>			
X.XX	+/- 0.03	ENG										
X.XXX	+/- 0.003	MFG			SCALE	SIZE	DRAWING NO.	REV				
ANGLES +/- 0.5° ALL DIMENSIONS IN <input checked="" type="checkbox"/> INCHES <input checked="" type="checkbox"/> MILLIMETERS		THIRD ANGLE PROJECTION		QA	10:1	A	208103	A				
				CUST	DO NOT SCALE DRAWING		SHEET 1 OF 1					
				REVISED								